

SPECIFICATION FOR APPROVAL

(♦)	Preliminar	y Specification
---	----------	---	------------	-----------------

() Final Specification

Title		10.1" HD TFT LCD			
		_			
Customor	Dall		SLIPPLIER	LG Display Co. Ltd	

Customer	Dell
MODEL	

SUPPLIER	LG Display Co., Ltd.	
*MODEL	LP101WH1	
Suffix	TLB1	

^{*}When you obtain standard approval, please use the above model name without suffix

APPROVED BY	SIGNATURE
/	
/	
/	
Please return 1 copy for you your signature and commen	

APPROVED BY	SIGNATURE
G. J. Kwon/ Manager	
REVIEWED BY	
C. J. Jun / Manager	<u> </u>
PREPARED BY	
P. A. Choi / Engineer	
Products Engineerin LG Display Co.,	

Ver. 1.0 Feb. 06, 2009 1 / 27



Contents

No	ITEM	Page
	COVER	1
	CONTENTS	2
	RECORD OF REVISIONS	3
1	GENERAL DESCRIPTION	4
2	ABSOLUTE MAXIMUM RATINGS	5
3	ELECTRICAL SPECIFICATIONS	
3-1	ELECTRICAL CHARACTREISTICS	6
3-2	INTERFACE CONNECTION	7
3-3	LVDS SIGNAL TIMING SPECIFICATIONS	8
3-4	SIGNAL TIMING SPECIFICATIONS	10
3-5	SIGNAL TIMING WAVEFORMS	10
3-6	COLOR INPUT DATA REFERNECE	11
3-7	POWER SEQUENCE	12
4	OPTICAL SFECIFICATIONS	13
5	MECHANICAL CHARACTERISTICS	16
6	RELIABLITY	20
7	INTERNATIONAL STANDARDS]
7-1	SAFETY	21
7-2	EMC	21
8	PACKING	
8-1	DESIGNATION OF LOT MARK	22
8-2	PACKING FORM	22
9	PRECAUTIONS	23
Α	APPENDIX. Enhanced Extended Display Identification Data	25



RECORD OF REVISIONS

Revision No	Revision Date	Page	Description	EDID ver
0.0	Sep. 22. 2008	All	First Draft (Preliminary Specification)	-
0.1	Oct. 22. 2008	All	Spec update	-
0.2	Dec. 10. 2008	6	Electrical Characteristics	-
		10	Timing Table	-
		7	36 pin(@ Pin Map)	-
		16	Activer Area Dimension	-
		25~27	EDID update	-
0.3	Jan. 13. 2009	6	Electrical Characteristics	-
		13	Optical Characteristics	-
		14	Gray Scale specification	-
		17~18	Mechanical Characteristics	-
		25~27	EDID	
1.0	Feb. 06. 2009	-	Final CAS	

Ver. 1.0 Feb. 06, 2009 3 / 27




1. General Description

The LP101WH1 is a Color Active Matrix Liquid Crystal Display with an integral LED backlight system. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally white mode. This TFT-LCD has 10.1inches diagonally measured active display area with HD resolution(1366 horizontal by 768 vertical pixel array). Each pixel is divided into Red, Green and Blue subpixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 6-bit gray scale signal for each dot, thus, presenting a palette of more than 262,144 colors.

The LP101WH1 has been designed to apply the interface method that enables low power, high speed, low EMI.

The LP101WH1 is intended to support applications where thin thickness, low power are critical factors and graphic displays are important. In combination with the vertical arrangement of the sub-pixels, the LP101WH1 characteristics provide an excellent flat display for office automation products such as Notebook PC.

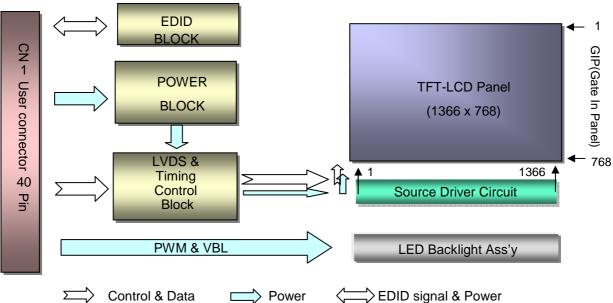

General Features

Active Screen Size	10.1 inches diagonal
Outline Dimension	235(H) × 143(V) × .5.3(D,Max.) [mm]
Pixel Pitch	0.16305mm × 0.16305 mm
Pixel Format	1366 horiz. By 768 vert. Pixels RGB strip arrangement
Color Depth	6-bit, 262,144 colors
Luminance, White	250 cd/m²(Typ.5 point)
Power Consumption	Total 3.58 Watt(Typ.) @ LCM circuit 1.16 Watt(Typ.), B/L input 2.42 Watt(Typ.) (W/O LED Driver)
Weight	210g (Max.)
Display Operating Mode	Transmissive mode, normally white
Surface Treatment	Anti-Glare treatment of the front polarizer
RoHS Comply	Yes
Ver. 1.0	Feb. 06, 2009 4 / 27



2. Absolute Maximum Ratings


The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

Table 1. ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Val	ues	Units	Notes	
i didiliciei	Symbol	Min	Max	Office		
Power Input Voltage	VCC	-0.3	4.0	Vdc	at 25 ± 5°C	
Operating Temperature	Тор	0	50	°C	1	
Storage Temperature	Нѕт	-20	60	°C	1	
Operating Ambient Humidity	Нор	10	90	%RH	1	
Storage Humidity	Нѕт	10	90	%RH	1	

Note: 1. Temperature and relative humidity range are shown in the figure below.

Wet bulb temperature should be 39°C Max, and no condensation of water.

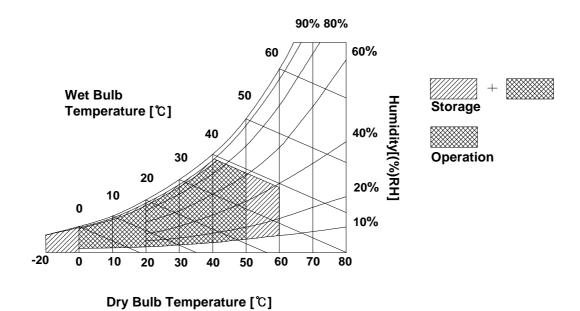

Ver. 1.0 Feb. 06, 2009 5 / 27



3. Electrical Specifications

3-1. Electrical Characteristics


The LP101WH1 requires two power inputs. One is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The second input which powers the LED BL.

Table 2. ELECTRICAL CHARACTERISTICS

Parameter	Symbol		Unit	Notes		
Farameter	Symbol	Min	Тур	Max	Offic	Notes
MODULE :						
Power Supply Input Voltage	VCC	3.0	3.3	3.6	V_{DC}	
Power Supply Input Current	I _{cc}	-	350	402	mA	1
Power Consumption	Pc	-	1.16	1.33	Watt	1
Differential Impedance	Zm	90	100	110	Ohm	2
LED Backlight (With LED Driver):						
LED Driver (@12V)	P_{DRIVER}	-	0.21	0.25	Watt	
Operating Voltage	V_{LED}	-	28.8	30.6	V	
Operating Current per string	I _{LED}	-	21	-	mA	3
Power Consumption	P _{BL}	-	2.42	2.57	Watt	4
Life Time		15,000			Hrs	5

Note)

1. The specified current and power consumption are under the Vcc = 3.3V, $25^{\circ}C$, fv = 60Hz condition whereas Mosaic pattern is displayed and fv is the frame frequency.



- 2. This impedance value is needed to proper display and measured form LVDS Tx to the mating connector.
- 3. The typical operating current is for the typical surface luminance (L_{WH}) in optical characteristics. I_{LED} is the current of each LED's string, LED backlight has 4 strings on it.
- 4. The LED power consumption shown above does not include power of external LED driver circuit for typical current condition.
- 5. The life time is determined as the time at which brightness of LED is 50% compare to that of initial value at the typical LED current.

Ver. 1.0 Feb. 06, 2009 6 / 27



3-2. Interface Connection

This LCD employs one interface connection, a 40 pin connector is used for the module electronics interface.


Table 3. MODULE CONNECTOR PIN CONFIGURATION (CN1)

Dia	Cure had	Table 3. MODULE CONNECTOR PIN CONF	,
Pin	Symbol	Description	Notes
1	CT1/NC	Connector Test/No Connection(Reserved)	
2	VDD	+3.3V Power Supply	
3	VDD	+3.3V Power Supply	
4	V_{EDID}	+3.3V EDID Power	1, Interface chips
5	Test	Panel Self Test	1.1 LCD: SiW, 1port including LVDS Receiver
6	CLK _{EDID}	EDID Clock Input	1.2 System :
7	DATA _{EDID}	EDID Data Input	* Pin to Pin compatible with LVDS
8	RxIN0-	LVDS differential data input	2. Connector
9	RxIN0+	LVDS differential data input	2.1 LCD :I-PEX 20455-040E-0*
10	GND	Ground	(Locking type)
11	RxIN1-	LVDS differential data input	or equivalent
12	RxIN1+	LVDS differential data input	2.2 Mating:
13	GND	Ground	2.3 Connector pin arrangement
14	RxIN2-	LVDS differential data input	
15	RxIN2+	LVDS differential data input	40 1 П П П П
16	GND	Ground	
17	RxCLKIN-	LVDS differential clock input	
18	RxCLKIN+	LVDS differential clock input	[LCD Module Rear View]
19	GND	Ground	[LOD Module Real view]
20	NC NC	No Connection	
21	NC NC	No Connection	
22	GND	Ground	
23	NC NC	No Connection	
24	NC NC	No Connection	
25	GND	Ground	
26	NC NC	No Connection	
27	NC	No Connection	
28	GND	Ground	
29	NC NC	No Connection	
30	NC NC	No Connection	
31	VLED_GND	LED Ground	
32	VLED_GND	LED Ground	
33	VLED_GND	LED Ground	
34	CT2/NC	Connector Test/No Connection(Reserved)	
35	S_PWMIN	System PWM signal input(+3.3V swing)	
36	BL_ON	LED Enable(3.3V Input)[Note 1]	
37	NC	No Connection	
38	VLED	4.5~21V LED Power Supply	
39	VLED	4.5~21V LED Power Supply	[Note 1]
40	VLED		On: 2.0V↑,Off:0~0.4V
40	VLED	4.5~21V LED Power Supply	




3-3. LVDS Signal Timing Specifications

3-3-1. DC Specification

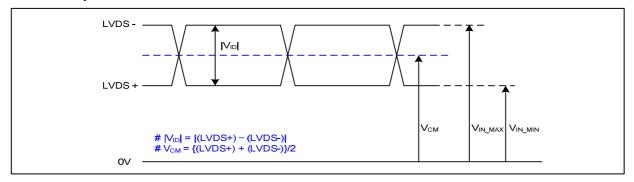

Description	Symb ol	Min	Max	Unit	Notes
LVDS Differential Voltage	V _{ID}	100	600	mV	-
LVDS Common mode Voltage	V _{CM}	0.6	1.8	V	-
LVDS Input Voltage Range	V _{IN}	0.3	2.1	V	-


3-3-2. AC Specification

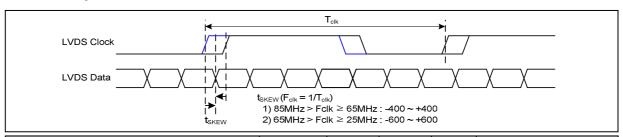


Description	Symbol	Min	Max	Unit	Notes
LVDS Clock to Data Skow Margin	t _{SKEW}	- 400	+ 400	ps	85MHz > Fclk ≥ 65MHz
LVDS Clock to Data Skew Margin	t _{SKEW}	- 600	+ 600	ps	65MHz > Fclk ≥ 25MHz
LVDS Clock to Clock Skew Margin (Even to Odd)	t _{SKEW_EO}	- 1/7	+ 1/7	T _{clk}	-
Maximum deviation of input clock frequency during SSC	F _{DEV}	-	± 3	%	-
Maximum modulation frequency of input clock during SSC	F _{MOD}	-	200	KHz	-

Ver. 1.0 Feb. 06, 2009 8 / 27



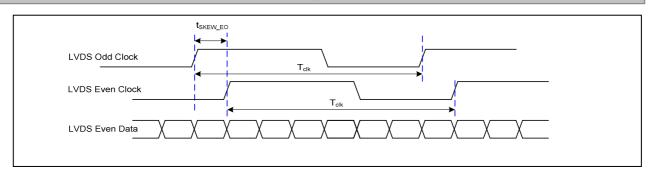


< Clock skew margin between channel >

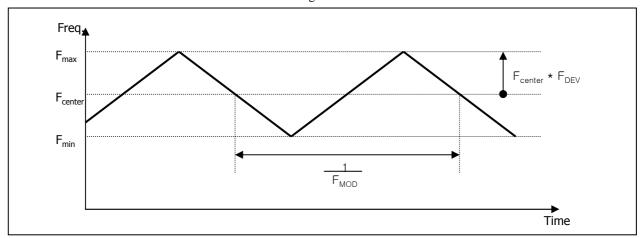

< Spread Spectrum >

3-3-3. Data Format

- LVDS 1 Port

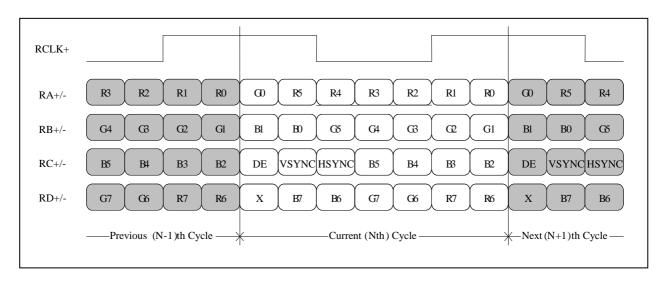

< LVDS Data Format >

Ver. 1.0 Feb. 06, 2009 9 / 27

Condition: VCC =3.3V

10 / 27



Data Enable

Ver. 1.0


Product Specification

3-4. Signal Timing Specifications

This is the signal timing required at the input of the User connector. All of the interface signal timing should be satisfied with the following specifications and specifications of LVDS Tx/Rx for its proper operation.

Table 5. TIMING TABLE

ITEM	Symbol		Min	Тур	Max	Unit	Note		
DCLK	Frequency	f _{CLK}	ı	72.3	1	MHz			
	Period	Thp	1470	1526	1586				
Hsync	Width	t _{wH}	23	32	40	tCLK			
	Width-Active		1366	1366	1366				
	Period	t _{VP}	779	790	801				
Vsync	C Width		Width	t _{wv}	2	5	8	tHP	
	Width-Active	t _{wva}	768	768	768				
	Horizontal back porch	t _{HBP}	72	80	124	tCLK			
Data	Horizontal front porch	t _{HFP}	8	48	48	ICLN			
Enable	Vertical back porch	t _{VBP}	8	14	20	tHP			
	Vertical front porch	t _{VFP}	1	3	5	ווייייייייייייייייייייייייייייייייייייי			

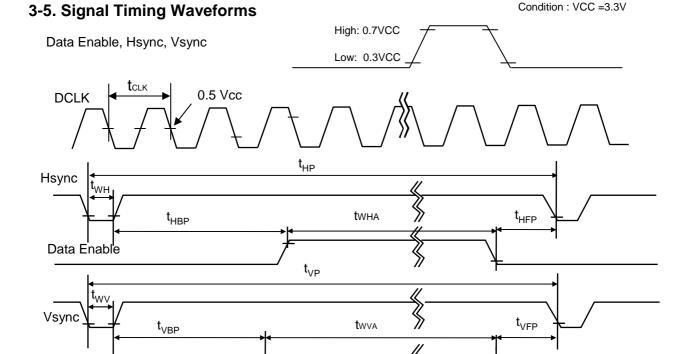

Feb. 06, 2009



3-6. Color Input Data Reference

The brightness of each primary color (red,green and blue) is based on the 6-bit gray scale data input for the color; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Table 7. COLOR DATA REFERENCE

			Input Color Data																
	Color			RE	D					GRE	EN					BL	UE		
`	50101	MSE	3				LSB		3				LSB		3				LSB
		R 5	R 4	R 3	R 2	R 1	R 0	G 5	G 4	G 3	G 2	G 1	G 0	B 5	B 4	В3	B 2	B 1	B 0
	Black	0	0			0	0	0	0			0	0	0	0	0		0	0
	Red	1	.1	.1	. 1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Basic	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1		
Color	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	RED (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (01)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
RED		ļ																	
	RED (62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (01)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
GREEN		ļ			• • • • • •												• • • • • •		• • • • • •
	GREEN (62)	0	0	0	0	0	0	1	1	1	1	 1	0	0	0	0	0	0	0
	GREEN (63)	0	0	0	0	0	0	1	1	1	 1	 1	1	0	0	0	0	0	0
	BLUE (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (01)	0	0	0	0	0	0	0	0	0		 0	0	0	 0	0			 1
BLUE		ļ			 			·····			.								
	BLUE (62)	0	0	0	··			0	0	:	0	 0		1	 1	1	 1	 1	
	BLUE (63)	 0	0					 0	0			 0	0		' 1	<u>'</u> 1	<u>'</u> 1		č 1
	DEGE (00)	Ľ	U	-	-	-	0	Ľ	0		-		- 0	Ľ		'		'	'

Ver. 1.0 Feb. 06, 2009 11 / 27



3-7. Power Sequence

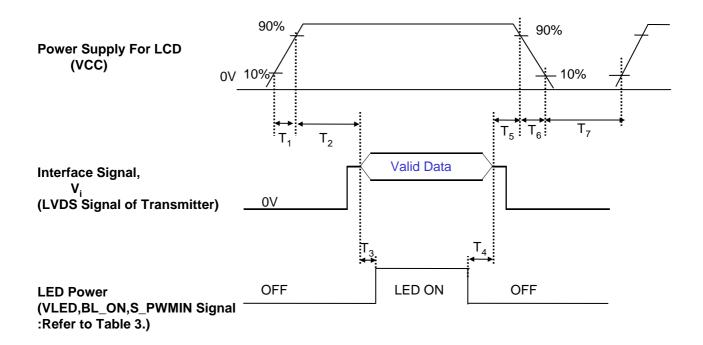


Table 7. POWER SEQUENCE TABLE

Parameter		Value	Units	
	Min.	Тур.	Max.	
T ₁	0.5	-	10	(ms)
T ₂	0	-	50	(ms)
T ₃	200	-	-	(ms)
T ₄	200	-	-	(ms)
T ₅	0	-	50	(ms)
T ₆	3	-	10	(ms)
T ₇	400	-	-	(ms)

Note'

- 1. Valid Data is Data to meet "3-3. LVDS Signal Timing Specifications"
- 2. Please avoid floating state of interface signal at invalid period.
- 3. When the interface signal is invalid, be sure to pull down the power supply for LCD VCC to 0V.
- 4. LED power must be turn on after power supply for LCD and interface signal are valid.

Ver. 1.0 Feb. 06, 2009 12 / 27



4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 30 minutes in a dark environment at 25°C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of Φ and Θ equal to 0° .

FIG. 1 presents additional information concerning the measurement equipment and method.

FIG. 1 Optical Characteristic Measurement Equipment and Method

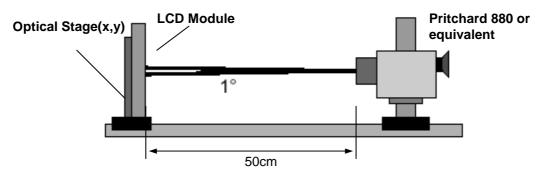


Table 8. OPTICAL CHARACTERISTICS

Ta=25°C, VCC=3.3V, f_{V} =60Hz, f_{CLK} = 71MHz, I_{BL} = 20 mA

Dorometer	Cymbal		Values		Lloito	Notes
Parameter	Symbol	Min	Тур	Max	Units	Notes
Contrast Ratio	CR	400	-	-		1
Surface Luminance, white	L_WH	230	250		cd/m ²	2
Luminance Variation	δ_{WHITE}	-	1.4	1.6		3
Response Time	Tr_{R} + Tr_{D}	-	16	25	ms	4
Color Coordinates						
RED	RX	0.564	0.594	0.624		
	RY	0.323	0.353	0.383		
GREEN	GX	0.297	0.327	0.357		
	GY	0.554	0.584	0.614		
BLUE	BX	0.121	0.151	0.181		
	BY	0.081	0.111	0.141		
WHITE	WX	0.283	0.313	0.343		
	WY	0.299	0.329	0.359		
Viewing Angle						5
x axis, right(Φ=0°)	Θr	60	-		degree	
x axis, left (Φ =180°)	Θl	60	-	-	degree	
y axis, up (Φ=90°)	Θu	50	-	<u>-</u>	degree	
y axis, down (Φ=270°)	Θd	50	-	-	degree	
Gray Scale			2.2			6

Ver. 1.0 Feb. 06, 2009 13 / 27



Note)

1. Contrast Ratio(CR) is defined mathematically as

Contrast Ratio =

Surface Luminance with all black pixels

2. Surface luminance is the average of 5 point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG 1.

$$L_{WH} = Average(L_1, L_2, ... L_5)$$

3. The variation in surface luminance , The panel total variation (δ_{WHITE}) is determined by measuring L_N at each test position 1 through 13 and then defined as followed numerical formula. For more information see FIG 2.

$$\delta_{\text{WHITE}} = \frac{\text{Maximum}(\textbf{L}_{1}, \textbf{L}_{2}, \ \dots \ \textbf{L}_{13})}{\text{Minimum}(\textbf{L}_{1}, \textbf{L}_{2}, \ \dots \ \textbf{L}_{13})}$$

- 4. Response time is the time required for the display to transition from white to black (rise time, Tr_R) and from black to white(Decay Time, Tr_D). For additional information see FIG 3.
- 5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 4.
- 6. Gray scale specification

*
$$f_{V} = 60$$
Hz

Gray Level	Luminance [%] (Typ)
LO	0.24
L7	0.74
L15	2.57
L23	6.75
L31	15.48
L39	32.89
L47	56.63
L55	76.95
L63	100

Ver. 1.0 Feb. 06, 2009 14 / 27



FIG. 2 Luminance

<measuring point for surface luminance & measuring point for luminance variation>

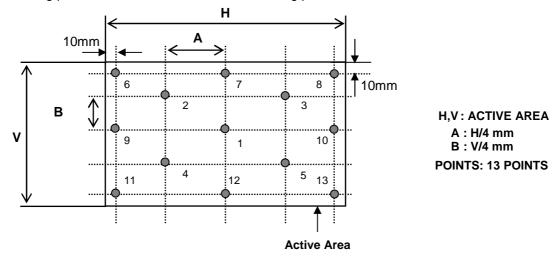


FIG. 3 Response Time

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".


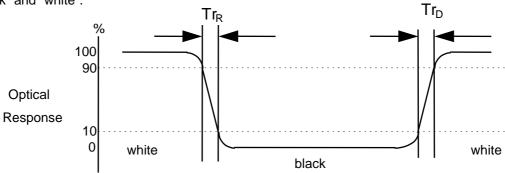


FIG. 4 Viewing angle



Ver. 1.0 Feb. 06, 2009 15 / 27

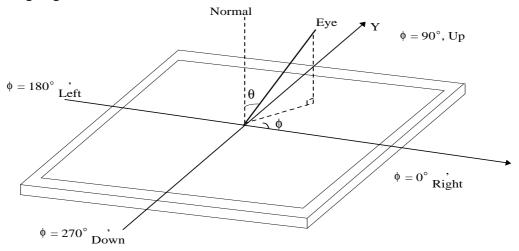

5. Mechanical Characteristics


The contents provide general mechanical characteristics for the model LP101WH1. In addition the figures in the next page are detailed mechanical drawing of the LCD.

	Horizontal	$235.0\pm0.5~\text{mm}$			
Outline Dimension	Vertical	143.0 ± 0.5 mm			
	Thickness	5.3mm (max)			
Bezel Area	Horizontal	226.00 mm			
bezer Area	Vertical	128.70 mm			
Active Display Area	Horizontal	222.72 mm			
Active Display Area	Vertical	125.28 mm			
Weight	210g (Max.)				
Surface Treatment	Anti-Glare treatment of the front polarizer				

Ver. 1.0 Feb. 06, 2009 16 / 27




<FRONT VIEW> 108.00 at 1.50

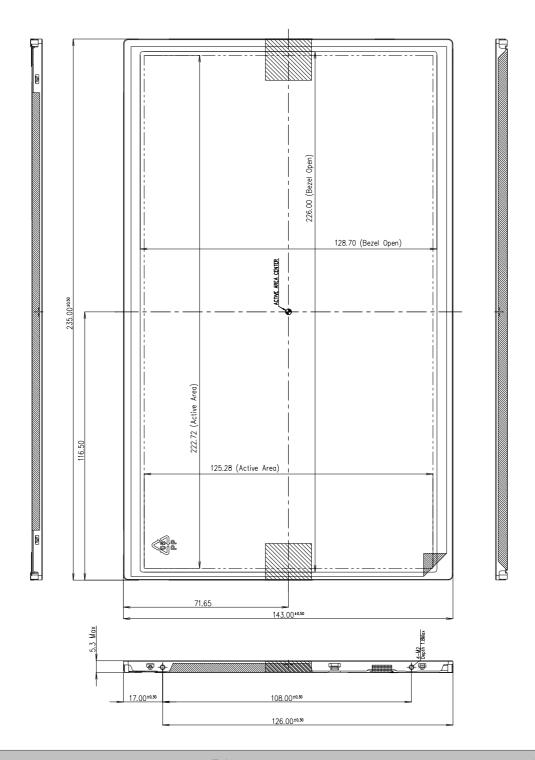




<REAR VIEW>

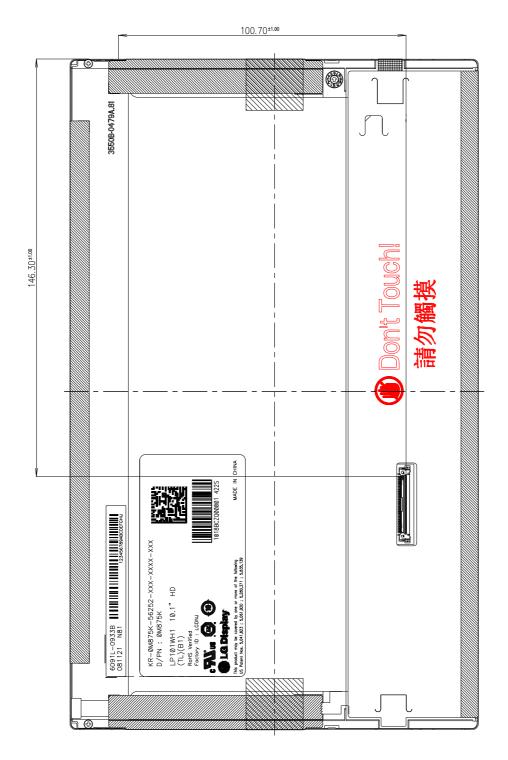



[DETAIL DESCRIPTION OF SIDE MOUNTING SCREW]

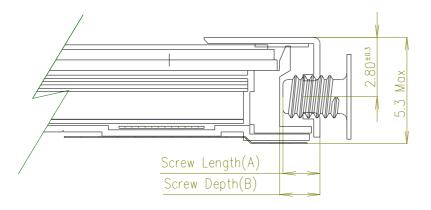


- * Mounting Screw Length (A) = 1.5(Min) /1.8(Max)
- * Mounting Screw Hole Depth (B) = 1.8(Min)
- * Mounting hole location : 2.8(typ.)
- * Torque : 2.0 kgf.cm(Max)

(Measurement gauge: torque meter)

Section A-A

Notes: 1. Screw plated through the method of non-electrolytic nickel plating is preferred to reduce possibility that results in vertical and/or horizontal line defect due to the conductive particles from screw surface.

[DETAIL INFORMATION OF PPID LABEL AND REVISION CODE]

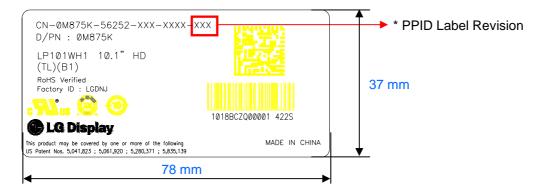

* PPID Label Revision:

It is subject to change with Dell event. Please refer to the below table for detail.

Classification	No Change	1st Revision	2nd Revision		9th Revision	
SST(WS)	X00	X01	X02		A09	
PT(ES)	X10	X11	X12		A19	
ST(CS)	X20	X21	X22	•••	A29	•••
XB(MP)	A00	A01	A02		A09	•••

Ver. 1.0 Feb. 06, 2009 19 / 27



6. Reliability

Environment test condition

No.	Test Item	Conditions					
1	High temperature storage test	Ta= 60°C, 240h					
2	Low temperature storage test	Ta= -20°C, 240h					
3	High temperature operation test	Ta= 50°C, 50%RH, 240h					
4	Low temperature operation test	Ta= 0°C, 240h					
5	Vibration test (non-operating)	Sine wave, 10 ~ 500 ~ 10Hz, 1.5G, 0.37oct/min 3 axis, 1hour/axis					
6	Shock test (non-operating)	Half sine wave, 180G, 2ms one shock of each six faces(I.e. run 180G 6ms for all six faces)					
7	Altitude operating storage / shipment	0 ~ 10,000 feet (3,048m) 24Hr 0 ~ 40,000 feet (12,192m) 24Hr					

{ Result Evaluation Criteria }

There should be no change which might affect the practical display function when the display quality test is conducted under normal operating condition.

Ver. 1.0 Feb. 06, 2009 20 / 27



7. International Standards

7-1. Safety

a) UL 60950-1:2003, First Edition, Underwriters Laboratories, Inc.,

Standard for Safety of Information Technology Equipment.

b) CAN/CSA C22.2, No. 60950-1-03 1st Ed. April 1, 2003, Canadian Standards Association,

Standard for Safety of Information Technology Equipment.

c) EN 60950-1:2001, First Edition,

European Committee for Electrotechnical Standardization(CENELEC)

European Standard for Safety of Information Technology Equipment.

7-2. EMC

- a) ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electrical Equipment in the Range of 9kHZ to 40GHz. "American National Standards Institute(ANSI), 1992
- b) C.I.S.P.R "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." International Special Committee on Radio Interference.
- c) EN 55022 "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." European Committee for Electrotechnical Standardization.(CENELEC), 1998 (Including A1: 2000)

Ver. 1.0 Feb. 06, 2009 21 / 27



8. Packing

8-1. Designation of Lot Mark

a) Lot Mark

A,B,C : SIZE(INCH) D : YEAR

E: MONTH F ~ M: SERIAL NO.

Note

1. YEAR

Year	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010
Mark	1	2	3	4	5	6	7	8	9	0

2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	Α	В	С

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module. This is subject to change without prior notice.

8-2. Packing Form

a) Package quantity in one box: 40 pcs

b) Box Size: 395mm × 390mm × 309mm

Ver. 1.0 Feb. 06, 2009 22 / 27



9. PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD module.

9-1. MOUNTING PRECAUTIONS

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to the resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment.
 Do not touch the surface of polarizer for bare hand or greasy cloth.(Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

9-2. OPERATING PRECAUTIONS

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage : $V=\pm\ 200mV(Over\ and\ under\ shoot\ voltage)$
- (2) Response time depends on the temperature.(In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower.) And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.

Ver. 1.0 Feb. 06, 2009 23 / 27



9-3. ELECTROSTATIC DISCHARGE CONTROL

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE

Strong light exposure causes degradation of polarizer and color filter.

9-5. STORAGE

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object.

 It is recommended that they be stored in the container in which they were shipped.

9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM

- (1) When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer.
 - Please carefully peel off the protection film without rubbing it against the polarizer.
- (3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
- (4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

Ver. 1.0 Feb. 06, 2009 24 / 27



APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 1/3

	Byte	Byte	Field Name and Comments	Value	Value
	(Dec)	(Hex)		(Hex) 00	(Bin) 00000000
	0	00	Header Header	FF	11111111
	2	02	Header	FF	11111111
ler	3	03	Header	FF	11111111
Header	4	04	Header	FF	11111111
H	5	05	Header	FF	11111111
	6	06	Header	FF	11111111
	7	07	Header	00	00000000
Vendor / Product	8	08	EISA manufacture code (3 Character ID) LGD	30	00110000
	9	09	EISA manufacture code (Compressed ASCII)	E4	11100100
	10	0A		DC	11011100
	11	0B	(Hex. LSB first)	01	00000001
2	12	0C	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
/	13	0D	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
<u>*</u>	14	0E	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
g	15	0F	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
6	16 17	10 11	Week of Manufacture 0 weeks Year of Manufacture 2008years	00 12	00010010
					00000001
	18	12	EDID structure version # = 1	01	
	19	13	EDID revision # = 3	03	00000011
	20	14	Video input Definition = Digital signal	80	10000000
as a	21	15	Max H image size (Rounded cm) = 22 cm	16	00010110
lds	22	16	Max V image size (Rounded cm) = 13 cm	0D	00001101
Display	23	17	Display gamma = (gamma*100)-100 = Example:(2.2*100)-100=120 = 2.2 Gamma	78	01111000
,	24	18	Feature Support (no_DPMS, no_Active Off/Very Low Power, RGB color display, Timing BLK 1,no_ GTF)	0A	00001010
	25	19	Red/Green Low Bits (RxRy/GxGy)	1 E	00011110
~	26	1A	Blue/White Low Bits (BxBy/WxWy)	E5	11100101
MC MC	27	1B	Red X Rx = 0.594	98	10011000
po	28	1C	Red Y Ry =0.353	5A	01011010
Pn	29	1D	Green X $Gx = 0.327$	53	01010011
~	30	1E	Green Y Gy =0.584	95	10010101
Vendor / Product	31	1F	Blue X Bx = 0.151	26	00100110
en.	32	20	Blue Y By = 0.111	1C	00011100
>	33	21	White X Wx=0.313	50	01010000
	34	22		54	01010100
1			White Y Wy =0.329		
hea	35	23	Established timing 1 (00h if not used)	00	00000000
Established	36	24	Established timing 2 (00h if not used)	00	00000000
Est	37	25	Manufacturer's timings (00h if not used)	00	00000000
	38	26	Standard timing ID1 (01h if not used)	01	00000001
	39	27	Standard timing ID1 (01h if not used)	01	00000001
	40	28	Standard timing ID2 (01h if not used)	01	00000001
Standard Timing ID	41	29	Standard timing ID2 (01h if not used)	01	00000001
	42	2A	Standard timing ID3 (01h if not used)	01	00000001
	43	2B	Standard timing ID3 (01h if not used)	01	00000001
	44	2C	Standard timing ID4 (01h if not used) Standard timing ID4 (01h if not used)	01 01	00000001
	45	2D 2E	Standard timing ID4 (01h if not used) Standard timing ID5 (01h if not used)	01	00000001
	47	2F	Standard timing ID5 (01h if not used) Standard timing ID5 (01h if not used)	01	00000001
	48	30	Standard timing ID6 (01h if not used)	01	00000001
tar	49	31	Standard timing ID6 (01h if not used)	01	00000001
S	50	32	Standard timing ID7 (01h if not used)	01	00000001
	51	33	Standard timing ID7 (01h if not used)	01	00000001
	52	34	Standard timing ID8 (01h if not used)	01	00000001
	53	35	Standard timing ID8 (01h if not used)	01	00000001

Ver. 1.0 Feb. 06, 2009 25 / 27



APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 2/3

	Byte (Dec)	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
	54	36	Pixel Clock/10,000 (LSB) 71 MHz @ 60Hz	BC	10111100
Timing Descriptor #1	55	37	Pixel Clock/10,000 (MSB)	1B	00011011
	56	38	Horizontal Active (lower 8 bits) 1366 Pixels	56	01010110
	57	39	Horizontal Blanking(Thp-HA) (lower 8 bits) 132 Pixels	84	10000100
	58	3A	Horizontal Active / Horizontal Blanking(Thp-HA) (upper 4:4bits)	50	01010000
	59	3B	Vertical Avtive 768 Lines	00	00000000
	60	3C	Vertical Blanking (Tvp-HA) (DE Blanking typ.for DE only panels) 22 Lines	16	00010110
	61	3D	Vertical Active : Vertical Blanking (Tvp-HA) (upper 4:4bits)	30	00110000
	62	3E	Horizontal Sync. Offset (Thfp) 48 Pixels	30	00110000
	63	3F	Horizontal Sync Pulse Width (HSPW) 32 Pixels	20	00100000
	64	40	Vertical Sync Offset(Tvfp): Sync Width (VSPW) 3 Lines: 5 Lines	35	00110101
	65	41	Horizontal Vertical Sync Offset/Width (upper 2bits)	00	00000000
<u>""</u>	66	42	Horizontal Image Size (mm) 224 mm	E0	11100000
	67	43	Vertical Image Size (mm) 126 mm	7E	01111110
	68	44	Horizontal Image Size / Vertical Image Size	00	00000000
	69	45	Horizontal Border = 0 (Zero for Notebook LCD)	00	00000000
	70	46	Vertical Border = 0 (Zero for Notebook LCD)	00	00000000
		47	Non-Interlace, Normal display, no stereo, Digital Separate (Vsync_NEG, Hsync_POS), DE only note : LSB is set to	1B	00011011
	71	47	'I' if panel is DE-timing only. H/V can be ignored.	IB	00011011
	72	48	Pixel Clock/10,000 (LSB) 71 MHz @ 60Hz	BC	10111100
	73	49	Pixel Clock/10,000 (MSB)	1B	00011011
	74	4A	Horizontal Active (lower 8 bits) 1366 Pixels	56	01010110
	75	4B	Horizontal Blanking(Thp-HA) (lower 8 bits) 132 Pixels	84	10000100
	76	4C	Horizontal Active / Horizontal Blanking(Thp-HA) (upper 4:4bits)	50	01010000
Q 1	77	4D	Vertical Avtive 768 Lines	00	00000000
#	78	4E	Vertical Blanking (Tvp-HA) (DE Blanking typ.for DE only panels) 22 Lines	16	00010110
200	79	4F	Vertical Active : Vertical Blanking (Tvp-HA) (upper 4:4bits)	30	00110000
Timing Descriptor #2	80	50	Horizontal Sync. Offset (Thfp) 48 Pixels	30	00110000
<u>§</u>	81	51	Horizontal Sync Pulse Width (HSPW) 32 Pixels	20	00100000
3 T	82	52	Vertical Sync Offset(Tvfp): Sync Width (VSPW) 3 Lines: 5 Lines	35	00110101
ı.	83	53	Horizontal Vertical Sync Offset/Width (upper 2bits)	00	00000000
Į, į	84	54	Horizontal Image Size (mm) 224 mm	E0	11100000
	85	55	Vertical Image Size (mm) 126 mm	7E	01111110
	86	56	Horizontal Image Size / Vertical Image Size	00	00000000
	87	57	Horizontal Border = 0 (Zero for Notebook LCD)	00	00000000
	88	58	Vertical Border = 0 (Zero for Notebook LCD)	00	00000000
	89	59	Non-Interlace, Normal display, no stereo, Digital Separate (Vsync_NEG, Hsync_POS), DE only note: LSB is set to '1' if panel is DE-timing only. H/V can be ignored.	1B	00011011
Timing Descriptor #3	90	5A	Flag	00	00000000
	91	5B	Flag	00	00000000
	92	5C	Flag	00	00000000
	93	5D	Data Type Tag : Alphanumeric Data String (ASCII String)	FE	11111110
	94	5E	Flag	00	00000000
	95	5F	Dell P/N 1st Character = M	4 D	01001101
	96	60	Dell P/N 2nd Character = 8	38	00111000
	97	61	Dell P/N 3rd Character = 7	37	00110111
	98	62	Dell P/N 4th Character = 5	35	00110101
	99	63	Dell P/N 5th Character = K	4B	01001011
	100	64	EDID Revision Build Name = MP(X-Build), Revision # = A00	80	10000000
	101	65	Manufacturer P/N = 1	31	00110001
	102	66	Manufacturer P/N = 0	30	00110000
	103	67	Manufacturer P/N = 1	31	00110001
	104	68	Manufacturer P/N = W	57	01010111
	105	69	Manufacturer P/N = H	48	01001000
	106	6A	Manufacturer P/N = 1	31	00110001
	107	6B	Manufacturer P/N(If<13 char> 0Ah, then terminate with ASC II code 0Ah,set remaining char = 20h)	0A	00001010
			(2017)	V. 1	

Ver. 1.0 Feb. 06, 2009 26 / 27



APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 3/3

	Byte (Dec)	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
	108		Flag	00	00000000
	109		Flag	00	00000000
	110	6E	Flag	00	00000000
	111	6F	Data Type Tag: Descriptor Defined by manufacturer	00	00000000
	112	70	Flag	00	00000000
#4	113	71	SMBUS Value(Step #1) = 10 nits	00	00000000
or .	114	72	SMBUS Value(Step #2) = 17 nits	00	00000000
ipt	115	73	SMBUS Value(Step #3) = 24 nits	00	00000000
SC	116	74	SMBUS Value(Step #4) = 30 nits	00	00000000
De	117	75	SMBUS Value(Step #5) = 60 nits	00	00000000
Timing Descriptor #4	118	76	SMBUS Value(Step #6) = 100 nits	00	00000000
	119	77	SMBUS Value(Step #7) = 160 nits	00	00000000
Tü	120	78	SMBUS Value(Step #8) = 220 nits (Typically = FFh, Max nits)	00	00000000
	121	79	Single channel LVDS, No RTC support	01	00000001
	122	7A	BIST support	01	00000001
	123	7B	(If<13 char> 0Ah, then terminate with ASC II code 0Ah, set remaining char = 20h)	0A	00001010
	124	7C	(If<13 char> 0Ah, then terminate with ASC II code 0Ah,set remaining char = 20h)	20	00100000
	125	7D	(If<13 char> 0Ah, then terminate with ASC II code 0Ah,set remaining char = 20h)	20	00100000
Checksum	126	7 E	Extension flag (# of optional 128 panel ID extension block to follow, Typ = 0)	00	00000000
	127	7 F	Check Sum (The 1-byte sum of all 128 bytes in this panel ID block shall = 0)	0B	00001011

Ver. 1.0 Feb. 06, 2009 27 / 27